



Small case "click-case"

Advantages:

- quick and simple assembly without tools through click-fastener-system, optional with screw connection
- optimised EMC-features through EMC-textile gasket (optional)

Individuality:

- individual design of front and rear panel possible
- screen printing with different colours possible
- special sizes and special versions possible
- ventilated and closed version

Application:

suitable to take PCB or individual electronic components

Various possibilities:

- desktop enclosure
- for wall mounting 412-100-60
- with DIN-rail-clamps 412-100-50

Material:

galvanized sheet steel 1.0 mm

Finish:

RAL 7035 light grey

Dimensions (H x W x D):

ca. 170 x 40 x 105 mm

Degree of protection:


IP 30 ventilated

IP 40 closed



Description	Order no.
closed	412-100-00
ventilated	412-100-10

Front panel / rear panel

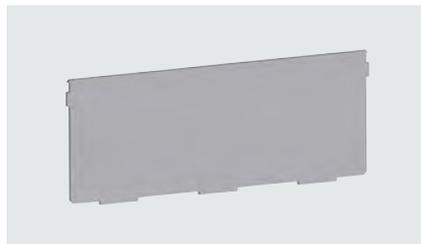

Material: sheet steel, galvanised 1,5 mm

Finish: RAL 7035 light grey

Order no.
412-100-20

Wall mounting bracket



• W x H x DT: 91 x 20 x 11,5 mm

• Assembly material included

Material: sheet steel, galvanised 1,5 mm

Finish: RAL 7035 light grey

Order no.
412-100-60

Bracket for top hat rail

- quick, safe and sturdy fixing of small enclosures, circuit boards and other components to rails (TS35) and support rails
- can be easily fixed from inside or outside to the enclosure's rear panel

Material: PA6 GF 30 black, classified acc. to UL 94 V-0



Description	Order no. (1 Set = 10 pieces)
Width 45 mm, with through-bore hole	442-311-20
Width 45 mm, with threaded inserts	442-311-25
Width 18 mm, with through-bore hole	442-311-30
Width 18 mm, with threaded inserts	442-311-35